



epoke[®]
GROUP



IGLOO TRAILER

Trailer-mounted belt spreader



- the safe way!

IGLOO TRAILER

- functional design and proven quality

IGLOO TRAILER S2400 is Epoke's flexible and integrated trailer and spreader solution. The spreading disc's working width of 1.5 - 6 m makes the IGLOO TRAILER S2400 suitable for spreading both dry and pre wetted salt and sand on bicycle paths, car parks, smaller roads and large spaces.

The IGLOO TRAILER S2400 consists of a particularly strong, purpose-built trailer to which Epoke's well-known and proven spreader, the IGLOO S2400, is bolted.

The trailer is available with one or two axles, with either hydraulic or overrun brakes. The one axeled is also equipped with a rotatable trailer eye and large, wide tires. The IGLOO TRAILER S2400 is an extremely robust solution that is designed for use in a harsh environment.

The spreader is width/quantity and speed compensated. Therefore, the set of the spreading amount per m² is constant, regardless of changes in spreading width and vehicle speed.

The IGLOO series is characterized by a simple design, and the engine compartment protects the hydraulic and electrical components from precipitation and dirt from the road. Together, this makes the spreader service-friendly with low operating costs as a result.


The dosing is basic set mechanically with the dosing damper, and the profiled conveyor belt works with all types of material. This ensures a stable and even supply of material and a perfectly distributed layer of the spreading material.

The spreader is powered by the vehicle's hydraulic supply through hydraulic pipes with a long service life and great operational reliability.

The IGLOO TRAILER S2400 can be supplied with Epoke's compact and user-friendly remote control, EpoMini X1, or with the advanced remote control, EpoMaster X1/X2 which allows for individual setup of spreading settings as well as data collection and GPS-controlled spreading.

By combining the base hopper and hopper extension frame, the spreader is obtained with a total dry matter hopper volume of 800 - 2000 litres. The hopper volume can therefore be adapted to the tasks of the individual spreader.

The metal parts of the IGLOO spreaders are sandblasted and rust-protected with two-component zinc dust primer and two-component top-coat and are therefore highly resistant to corrosion.

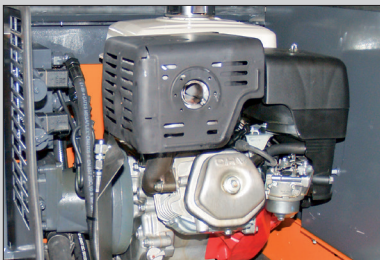

IGLOO can be delivered with a petrol engine.



The relief plate limits the weight of the material on the belt (option).



The trailer's 2-axle undercarriage is sprung and equipped with an overrun brake.

OPTIONS

- Pre-wetting system with the possibility of variable pre-wetting
- Petrol engine or hydraulic
- Foldable tarpaulin
- Stainless version
- Relief plate
- Center of gravity protection
- Hopper extension frame
- Electro-hydraulic draining
- EpoSat - GPS-controlled spreading
- Data collection
- Electrical symmetry



The tarpaulin opens across the entire width of the container and provides optimal filling of the container.



The tanks' wide surfaces provides an effective support, which minimizes the risk of breakage.



IGLOO Trailer is operated with Epomini X1, EpoMaster X1, or Epomaster X2.

Epoke Group

We produced our first sand and salt spreader in 1955, and since then we have solely focused on the development, production and sale of machines and equipment for the treatment of icy roads. Today, we are a global leader. In Denmark, sales are carried out by our own sales staff, while abroad our subsidiaries and 31 dealers manage sales.

Learn more on www.epoke.dk

Epoke A/S
Vejenvej 50
6600 Vejen
www.epoke.dk

