



THE SKE SERIES

- the simple and flexible towed spreader



- the safe way!

The SKE series

SKE spreaders are flexible towed spreaders, ideal for spreading sand and salt.

SKE spreaders are simple and speed-compensated spreaders, driven by a road wheel and connected to the towing hook on tractors or on small implement carriers.

The SKE series is based on the well-known Epoke dosing principle where the distributor roller and agitator are driven by the spreader's road wheel via mechanical gearing. The system ensures finely spread spreading material and a uniform spreading profile independent of the towing vehicle's speed. The limited distance between the distributor roller and the road surface means that the spreading profile is almost unaffected by sidewinds and turbulence.

The simple and robust design of the spreaders ensures excellent reliability, long lifetime and low maintenance costs.

Functions

The spreader's design ensures that the set quantity per m² is constant, regardless of speed changes, i.e. SKE spreaders are 100% speed-compensated.

Using the same design and standard equipment, the three variants, SKE 8, SKE 15 and SKE 20 differ only in terms of hopper capacity.

As with all Epoke machines, SKE spreaders are sand-blasted and rustproofed using a 2-component zinc dust primer and a 2-component topcoat.

Standard equipment

- Agitator
- Distributor roller
- Spring base
- Spring base adjustment
- Transmission
- Coupling
- Drive shaft and support wheel
- Extra agitator (sand model)

Extra equipment

- Electronic remote control
- Tarpaulin
- Hopper extension frame for SKE 15



The spreading amount is set using the handle, which controls the spring base adjustment.




The rubber strap effectively closes access to the transmission system.



Fitted eyes for lifting the empty spreader.

Technical data and dimensions

	SKE 8	SKE 15	SKE 20
Hopper capacity, l	800	1250	1650
Spreading width, mm	1008	1390	1918
Total width, mm	1285	1665	2195
Weight (kg)	400	600	720

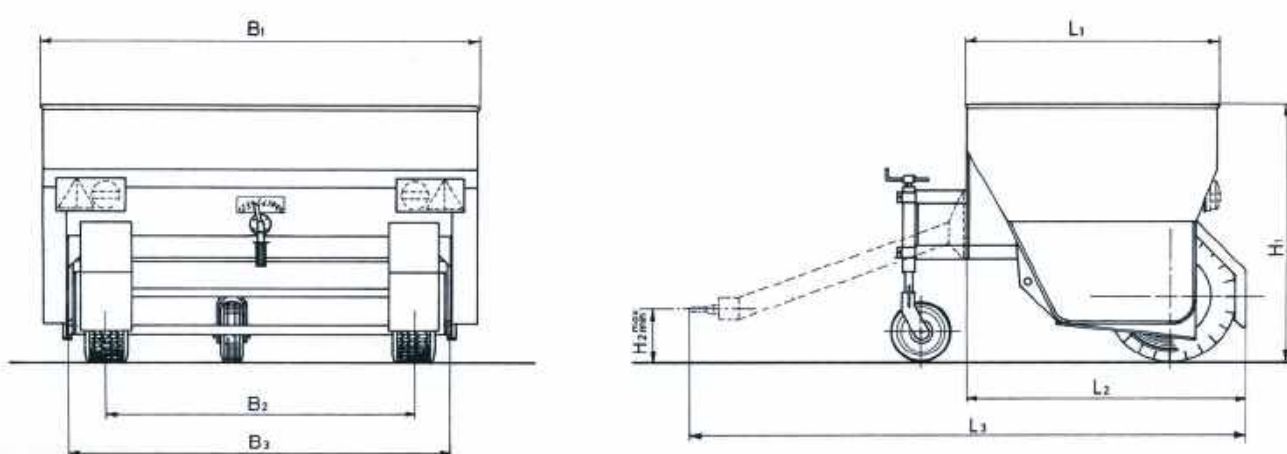

	W ₁	W ₂	W ₃	H ₁	H ₂		L ₁	L ₂	L ₃		V - m ³
					max.	min.			max.	min.	
SKE 8	1285	790	1008	1080	720	375	1200	-	-	-	0.8
SKE 15	1665	1000	1390	1300	630	275	1275	1395	2945	1771	1.25
SKE 20	2195	1530	1918	1300	630	275	1275	1395	2945	-	1.65



SKE spreaders are fast and easy to connect using the tractor's towing hook.



Towing, and connection and disconnection are easy and fast, using the adjustable support wheel.



Chocks for the spreader's wheels are located on the rear of the spreader and are easily accessible.

Epoke Group

We produced our first sand and salt spreader in 1955, and since then we have solely focused on the development, production and sale of machines and equipment for the treatment of icy roads. Today, we are a global leader. In Denmark, sales are carried out by our own sales staff, while abroad our subsidiaries and 31 dealers manage sales.

Learn more at www.epoke.dk

Epoke A/S
Vejenvej 50
6600 Vejen, Denmark
www.epoke.dk

