


LED Light Arrow LP 8

- Low wind load according to open design
- Continuous brightness adaptation
- Quick and easy mounting at or on vehicles and carriages
- Aluminium frame, slip-on type, for pointing left or right
- Bracket for mounting on tubes for manual setting to five different positions available



Light colour
yellow

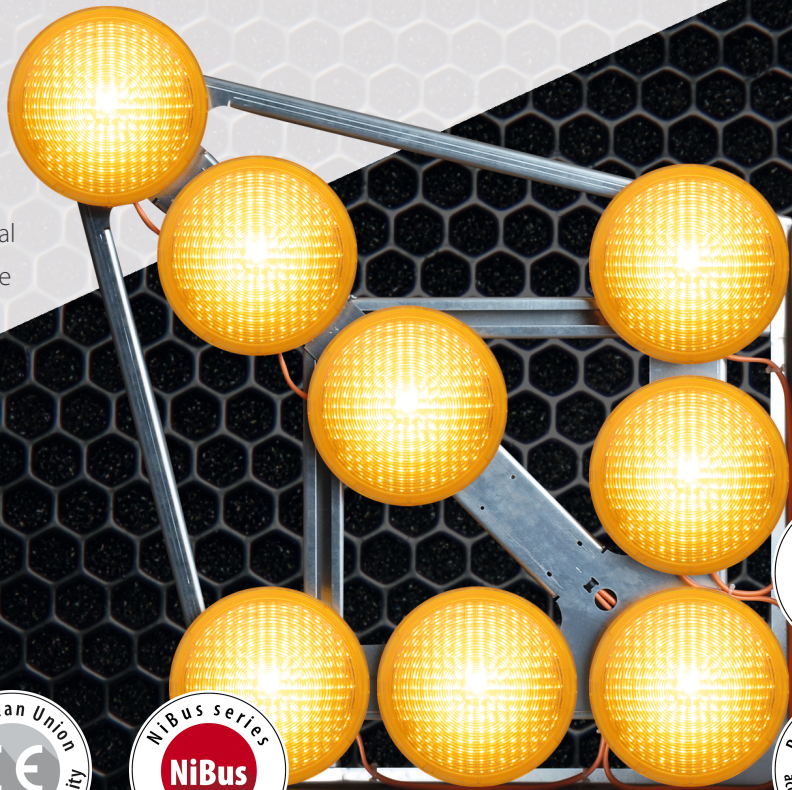

Max. light intensity
2200 cd



Eff. light intensity
1500 cd



Av. power consumpt. day
1.3 A



Operating voltage
12/24V



Weight
13 kg



Dimensions (LxWxH)
1130 x 900 x 165 mm

LED Light Arrow LP 8

Ref. No.

LED Light Arrow Type LP 8
consisting of:

129 361-152

8 Multi-Light 200 LED lamps 220 mm, mounted on an aluminium frame with slip-on device and 3 m connecting cable with battery clips

Accessories and Spare parts

Ref. No.

Bracket for mounting on tubes with adjustment device, 5 positions

329 360-1

Adapter for mounting on board sides

329 365-3

Operating time with one battery set

with rechargeable battery 12V, 56 Ah

50 hrs

With rechargeable battery 12V, 80 Ah

75 hrs

With rechargeable battery 12V, 180 Ah

160 hrs

With rechargeable battery 12V, 230 Ah

200 hrs



More information

NIS-00562

To be entered on nissen-germany.com