


LED Light Arrow LP 13 Classic

- Electrically switchable to pointing left or right or to light cross
- Sandwich-Feature: Fitting of a second combinable Light Arrow LP 13 for routing of oncoming and following traffic
- Solid bracket for mounting on tubes
- Optional with cable remote control Eco-Remote II



Light colour
yellow

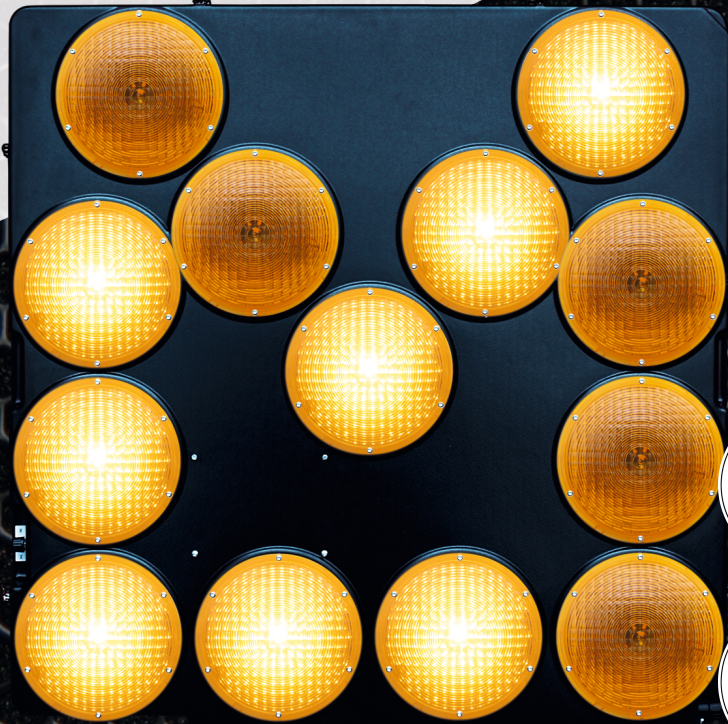

Eff. light intensity
1500 cd



Max. light intensity
2200 cd



Av. power consumpt. day
1.0 A



Operating voltage
12/24V



Weight
14 kg



Dimensions (HxWxD)
900 x 900 x 155 mm

LED Light Arrow LP 13 Classic

Ref. No.

LED Light Arrow LP 13 Classic
consisting of:
1 housing, made of highly weatherproof plastic
with 13 LED lamps 200 mm Ø
5 m connecting cable with battery clips

129 355-1

Accessories and Spare parts

Ref. No.

Eco-Remote II cable remote control
with 14 m cable and LP 13 holder
Hand remote control LP13-Class with 15m cable
Adapter for mounting on board sides

129 266-53

329 300-01

329 365-1

Operating time with one battery set

With rechargeable battery 12 V, 180 Ah

200 hrs

With rechargeable battery 12 V, 230 Ah

250 hrs



More information

NIS-01331

To be entered on nissen-germany.com