

LED Light Arrow LP 15

- High-grade steel frame with 15 energy-efficient light arrow lamps (220 mm) with only one LED each
- With light cross for use on hard shoulders
- Automatic day/night adaptation
- Optionally with 2-fold warning light system 340 mm
- Up to 2 switching outputs for additional equipment (working lights, front flashers etc.)
- Also available with motor-driven lifting/lowering device
- Approved according to EMC directive
- Optionally GPS



Light colour
yellow



Max. light intensity
2200 cd



Eff. light intensity
1500 cd



Av. power consumpt. day
1.2 A



Operating voltage
12/24 V



Weight
with roof frame 50 kg

Dimensions (HxWxD)
1230 x 1075 x 228 mm
(depending on version)


LED Light Arrow LP 15

Ref. No.

LED Light Arrow Type LP 15 wall mounting, with cable remote control Eco-Remote II	129473-401
LED Light Arrow Type LP 15 wall mounting, with twofold system Multilight 340 LED and cable remote control Eco-Remote II	129473-402
LED Light Arrow Type LP 15 wall mounting, with radio remote control Radio-Remote II	129473-501
LED Light Arrow Type LP 15 Kompakt with roof frame and lifting/lowering device, with cable remote control Eco-Remote II	129473-601
LED Light Arrow Type LP 15 Kompakt with roof frame, twofold system Multilight 340 LED and lifting/lowering device, with cable remote control Eco-Remote II	129473-602
LED Light Arrow Type LP 15 Kompakt with roof frame and lifting/lowering device, with Radio-Remote II	129473-701
LED Light Arrow Type LP 15 Kompakt with roof frame, twofold system Multilight 340 and lifting/lowering device, with Radio-Remote II	129473-702

Operating time with one battery set

With rechargeable battery 12V, 180 Ah	180 hrs
With rechargeable battery 12V, 230 Ah	230 hrs

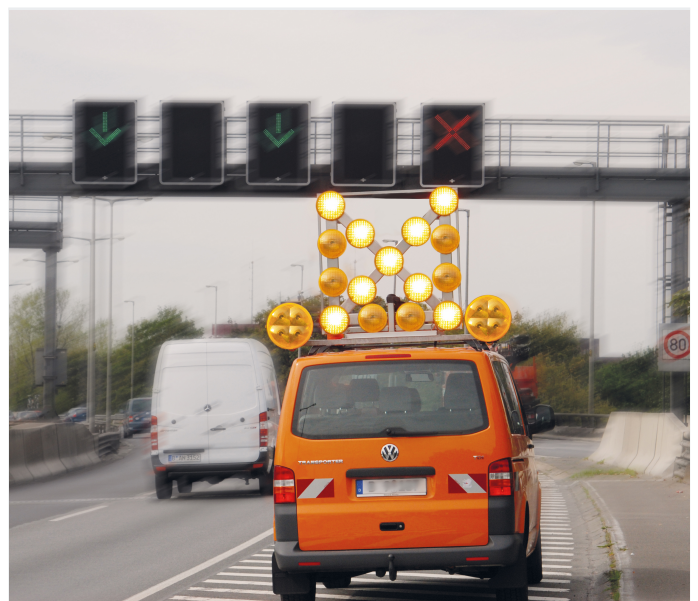

More information
NIS-01222
To be entered on nissen-germany.com

Test number
V3-24-2013