MACHINES

COR IST

## **ARR TRENCH ROLLERS**

**NMMANN** 

ARR SERIES TRENCH ROLLERS



## WHAT SEPARATES AMMANN TRENCH ROLLERS?

PRODUCTIVITY, ERGONOMICS, SERVICEABILITY SET THESE MACHINES APART



## ARR 1575

Operating weight: 1340 / 1440 kg (2950 / 3170 lb) Maximum weight: 1450 kg (3200 lb) Drum width: 640 / 850 mm (25.2 / 33.5 in) Engine: Yanmar – 14.6 kW (20 HP) EU Stage V/U.S. EPA Tier 4 Final Frequency: 40 Hz (2400 VPM) Amplitude: 0.6–1.1 mm (0.024–0.0043 in) Centrifugal force: 36–75kN (8093.1–16 8601bf)



## ARR 1585

Operating weight: 1305 / 1395 kg (2880 / 3080 lb) Maximum weight: 1315 / 1405 kg (2900 / 3100 lb) Drum width: 630 / 850 mm (24.8 / 33.5 in) Engine: Hatz – 13.2 kW (18 HP) EU Stage V/U.S. EPA Tier 4 Final Frequency: 30 Hz (1800 VPM) Amplitude: 2.4 mm (0.094 in) Centrifugal force: 86 kN (19 333 lbf)



## ARR 1575

## PRODUCTIVITY

#### Two-stage vibrator

Two different settings for amplitude and vibration enable usage on diverse jobsites

**Articulated joint with oscillation** Provides exceptional manoeuvrability and constant ground contact

## Drum extensions

Easily adjust working widths for added productivity

## ERGONOMICS

#### Infrared remote control

Safest solution; operator must have direct visibility for the machine to run

## Solar power cells

Machine is always ready to work without additional remote control charging

Automatic pairing of machine control Automatically determines the right communication frequency

## SERVICEABILITY

#### Maintenance-free parts

Reduce time required for machine maintenance and prevent damage to components

**Tool-free daily inspection** Daily maintenance possible without tools

#### **Bolted frame**

Clever solution for quick and easy machine servicing



## ARR 1585

## PRODUCTIVITY

#### **Compaction output**

Fast, precise compaction in the fewest possible passes

#### Skid-steer concept

Unique steering properties and turning «on-spot»

#### Traction

Powerful propulsion drive system and excellent machine weight distribution for unrivaled traction in slopes

## ERGONOMICS

### Machine controls

Various controls are available: manual, cable control or infared remote control

#### Infrared remote control

Safest solution; operator must have directly visibility for the machine to run

#### **Operator protection**

Increased safety during machine operation

## SERVICEABILITY

#### Maintenance-free parts

Reduce time required for machine maintenance and prevent damage to components


**Tool-free daily inspection** Daily maintenance possible without tools

### **Protective frame and covers** Maximum protection of all key

Maximum protection of all key components

## WINNING IN THE TRENCHES

Rammax (today part of Ammann Group) invented trench rollers more than 40 years ago. Since then, efforts have been made to improve the machines while also preserving what makes them successful. The longevity of the product line and the continuation of the varied versions prove Ammann's commitment to this market.

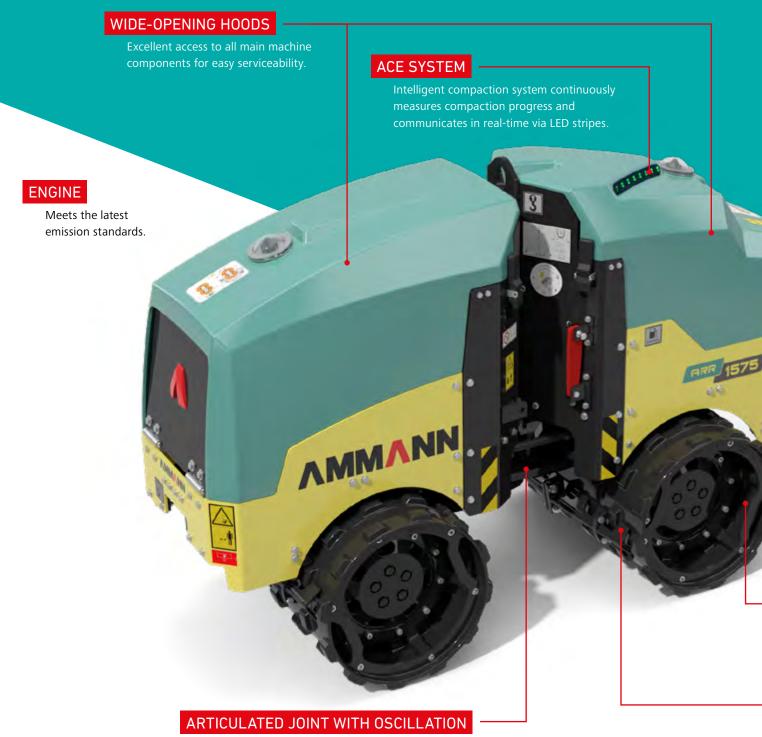

Connects the front and rear frame and ensures balanced weight distribution and permanent ground contact.

## MAINTENANCE-FREE PARTS

Vibratory unit with maintenance free components

## CENTRAL LIFTING HOOK

AMMANN

The central machine lifting point is conveniently located and easy to reach.

## CONTROLS

Operators can choose between manual, cable or infra-red controls.

### FOUR DRIVE WHEELS

Powerful drive system with four independent motors offers exceptional machine traction on steep grades.

#### VARIABLE WORKING WIDTHS

Drum extensions enable varied working widths – ARR 1575: 640 mm (25.2 in) or 850 mm (33.5 in) ARR 1585: 630 mm (24.8 in) or 850 mm (33.5 in)

### **ROBUST DESIGN**

Protects all key components, even in the toughest conditions.

SKID-STEER CONCEPT Manoeuvrable with 360°

on-the-spot turning.

# **TACKLE STUBBORN SOILS**

THESE MACHINES OVERCOME THE MOST CHALLENGING MATERIALS

Trench work is difficult, but Ammann ARR Trench Rollers are ready for the challenge. Multiple machine features help make operators efficient and improve productivity. The vibratory systems, as well as two different machine types, ensure the rollers overcome the varied materials they often encounter.

## ARR 1575

#### Two-stage vibrator

An innovative, two-stage vibratory system supplies the high compaction output that makes the machine an invaluable tool on the jobsite. Adjustable eccentric weights enable two different settings for amplitude and centrifugal force. This provides higher variable performance, depending on layer thickness and materials, helping the crew reach density targets in fewer passes. Eliminating unnecessary passes is essential to jobsite profitability.

"Ammann Trench Rollers excel in a variety of applications, including difficult cohesive soils."

#### Articulated joint with oscillation

Two steering cylinders offer great responsiveness and precision. A central steering joint with integrated oscillation features Teflon-coated bearing. The articulation joint connects the front and rear frame and ensures balanced weight distribution and constant ground contact.

#### **Drum extensions**

Drum construction enables two working widths. The basic working width of 640 mm (25,2 in) can be extended to 850 mm (33.5 in), which improves productivity in wider trenches. Conversely, the working width can be narrower in tighter trenches. This innovative solution is appreciated by rental fleets, which can meet varied needs with a single machine.



#### **ARR 1585**

#### High compaction output

The central vibratory system supplies industry-leading compaction output that makes the machine an invaluable tool on the jobsite. The high centrifugal force ensures effective results on varied jobsites and helps the crew reach density targets in fewer passes.


#### Skid-steer concept

The skid-steer concept with independent drum steer control brings unique manoeuvrability. The machine offers 360° "on-the-spot" turning for productivity in tight spaces – and operator comfort, too.

#### **Excellent traction**

Four drive motors in each drum, combined with easy directional changes of the exciter, bring additional power to the drive system – crucial in challenging conditions. Drums provide well-balanced weight distribution and a low centre of gravity that helps the machine excel on slopes and uneven surfaces. Trench rollers perform well in cohesive soil types that can be difficult to compact. The Ammann ARR 1575 and ARR 1585 are able to overcome the high moisture content in clays through their extreme compaction energy and the tamping effect of their padfoot drums. The machines perform effectively and quickly on less challenging soils, too.

### APPLICATION

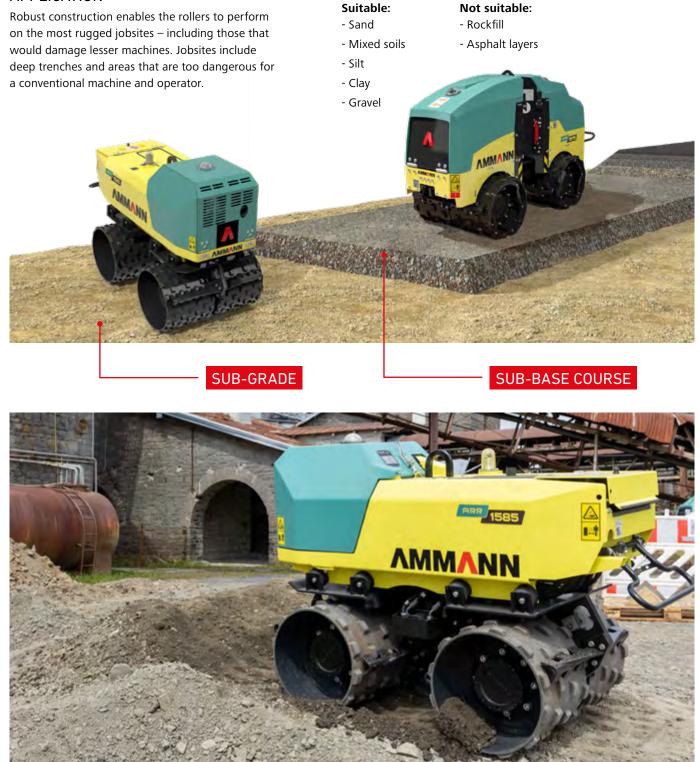

## SEE FOR YOURSELF

**INFRARED REMOTE CONTROL KEEPS OPERATORS SAFE** 

An innovative control system includes a wide range of features that enable easy operation and increased safety on the jobsite.

## ARR 1575

#### Infrared remote control

The infrared remote control is ergonomic, robust and waterproof. The control won't engage unless the operator has direct visibility of the machine, maximising jobsite safety.

#### Solar power cells

A dual charging system ensures the machine is always ready to go. The technologically advanced solar power cell can charge the remote control during the day or can be charged directly from the machine via cable connection.

#### Automatic pairing of machine control

The remote control and machine are automatically paired on a unique frequency. This innovative feature enhances safety by eliminating the risk of improper signals reaching a machine.



### ARR 1585

#### **Machine controls**

The rollers can be operated via onboard drive levers, a cable remote or an infrared remote control. A machine can be equipped with all three, giving the operator options based on the jobsite. Having these options available is particularly popular with rental fleets.

#### Infrared remote control

The infrared remote control is ergonomic, robust and waterproof. The control won't engage unless the operator has direct visibility of the machine, maximising jobsite safety.

#### **Operator protection**

An integrated dead man's handle protects the operator when working in narrow spaces, close to walls and in other potentially dangerous situations. In addition, all drive levers are equipped with a resetting function. Levers are automatically returned to the neutral position when the operator cannot control them. The use of an Infrared (IR) Remote Control. Operators can stay a comfortable distance from the roller, yet safety features ensure they never lose control of the machine.

55 🛆

0000

AMMANN

0 0

## VISUAL CONTACT NECESSARY! Machine stops without driect visibility!

INFRARED REMOTE CONTROL

### **SAFETY FEATURES**

- Perfectly positioned with no dead angles
- Short/far distance turn off
- Fully compliant with machine directives

9

• Visual contact necessary

# **ROOM TO REACH**

**KEY COMPONENTS AND SERVICE POINTS EASY TO ACCESS** 

Ammann Trench Rollers have been engineered to reduce the time required for maintenance — and to prevent damage to components, too. The wide-opening hood provides accessibility while also protecting the engine compartment. Tool-free daily inspections make maintenance quick and easy.

## ARR 1575

#### Maintenance-free parts

Heavy-duty components extend machine life and minimise the need for replacement parts. Many parts and components, including the articulation joint, drive and vibratory system, are maintenance free. This greatly reduces ownership costs by eliminating the need for replacement parts and saving time spent on machine maintenance.

#### **Tool-free daily inspection**

No tools are required to access daily maintenance points, ensuring that all steps are completed quickly. Routine maintenance is more efficient and convenient, thanks to accessible check and draining points. Parts that are most frequently maintained are easy to reach because of their location and the wideopening hoods.

#### **Bolted frame**

Side covers protect components to extend machine life and maximise jobsite uptime. The covers are removable because they are bolted, not welded, to the frame. This makes it much easier to access core components and hydraulic testing ports.



## "The hood opens wide to help crew members and technicians access the desired service points and components."

### ARR 1585

#### Maintenance-free parts

Heavy-duty components extend machine life and minimise the need for replacement parts. The complete vibratory system is maintenance free. This greatly reduces ownership costs by eliminating the need for replacement parts and saving time spent on machine maintenance.

#### **Tool-free daily inspection**

No tools are required to access daily maintenance points, ensuring that all steps are completed quickly. Routine maintenance is more efficient and convenient, thanks to accessible check and draining points. Parts that are most frequently maintained are easy to reach because of their location and the wide-opening hood.

#### Protective frame and covers

All components are securely mounted to the frame and fully isolated from vibration. The robust machine construction provides durability and prevents damage to components on even the toughest jobsites.



# ARR 1575

## WHERE MANOEUVRABILITY MATTERS

This technologically advanced machine comes in a compact body that can fit where operators can't – or shouldn't. Steering joint with integrated oscillating bearing and two steering cylinders gives high steering accuracy and permanent ground contact on uneven surfaces.

The two-stage vibratory system, positioned in the centre of each drum, combines with four drive motors for exceptional machine stability and delivers the needed compaction punch, while the size makes the machine a great fit in pipeline and trench applications.

Padfoot drums can be easily extended from basic working width 640mm (25,2 in) to 850mm (33,5 in) if it is required.

• Yanmar 3TNV80F, EU Stage V/U.S. EPA Tier 4f



## HIGHLIGHTS

- Articulated joint with oscillation and two steering cylinders for high steering accuracy and permanent ground contact
- Two-stage exciters placed in both drums for adjustable compaction output
- Optimal machine stability, low centre of gravity
- Wide-opening hoods for quick and easy machine checks before start-up
- Infrared remote control that can be charged directly from the machine or via solar cells
- Central lifting hook
- Working widths from 640 mm (25,2 in) or 850 mm (33,5 in) include scrapers



## ARR 1585

## WHEN POWER IS PRIMARY

The vibratory system, centrally positioned between the front and rear drums, generates the high compaction force needed on the most challenging jobsites.

The rigid-frame and skid-steered operation help operators succeed in all settings.

Durable components and the maintenance-free vibratory system minimise ownership costs.

• Hatz 2 G 40, EU Stage V/U.S. EPA Tier 4f



## HIGHLIGHTS

- Manoeuvrable with 360 on-spot turning
- Highest compaction output on the market
- Great machine stability, low centre of gravity
- Machine versions: Manual (M), Cable control (C), Infrared (I) or a combination
- Robust machine frame for tough conditions
- Maintenance-free parts
- Central lifting hook
- Working widths from 630 mm (24,8 in) or 850 mm (33,5 in) include scrapers



# OPTIONS

## MACHINE CUSTOMISATION

	ARR 1575	ARR 1585
Drums 640 mm (25.2 in) incl. Extensions	$\checkmark$	х
ACE compaction measurement system	$\checkmark$	х
Security bar	$\checkmark$	х
Biodegradable hydraulic oil	$\checkmark$	х
Customer color scheme	$\checkmark$	$\checkmark$
Service kit for the first 250h	~	$\checkmark$
Service kit for the first 500h	$\checkmark$	х
Toolset	$\checkmark$	$\checkmark$
Additional printed documentation	$\checkmark$	$\checkmark$
Certificate of origin	~	$\checkmark$





## DRUM EXTENSIONS

Easily changeable drum working widths.

## SECURITY BAR

- Reverse movement is blocked
- Machine can still move forward

## PLAY YOUR ACE CARD

**ELIMINATE PASSES** 

## ACE

- Continuous compaction measurement system
- Compaction progress simply indicated via LED
- Removes guesswork from the compaction equation and avoid unnecessary passes
- Mounted on the machine
- Can measure compaction at any point on-site



"Communicates in real time via LED stripes and prevents under/ over compaction."

.

ARR 1575

00

A F

0

AM

# SERVICE

A NETWORK TO SUPPORT YOU

No matter where you are, Ammann-trained technicians and parts are nearby. Ammann dealers provide welltrained service technicians who can help you, whether it's an emergency or time for preventive maintenance. The vast Ammann network ensures there is a nearby technician who understands your language and your technical needs. Parts availability and ease of ordering are always Ammann priorities.

## **HOTLINE SUPPORT**

Ammann experts are ready to answer your technical questions 24 hours a day, seven days a week. The hotline team is highly trained and experienced. Representatives can talk you through the challenges – in various languages – to help keep your machine productive.

### **SERVICE APP**

The service app for Ammann machines impresses machine operators who are already benefiting from the advantages of the free application. The easy-touse app provides machine operators working on site quick and uncomplicated access to machine documentation.

## **SERVICE VIDEOS**


Sometimes a video tells the story best. That's why you'll find a variety of service videos that walk you through service and maintenance processes.

## **QR CODE**

Many maintenance kits feature QR codes that link to videos with helpful demonstrations that walk you or your technician through the process. The videos tell the story without dialogue so customers anywhere in the world can understand.





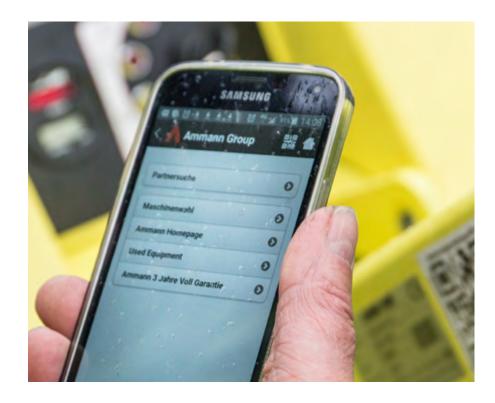



and asphalt pavers. You can choose which machines to track.

Ammann ServiceLin the locations of the

- Ammann ServiceLink utilises telematics that give you the locations of the machines, hours of usage and other essential information. You'll have access to data that will keep your machines running – and make them more productive, too.
  - Ammann ServiceLink makes it easy to plan and schedule the maintenance that protects your fleet.

Batterie

Batter (V)

Operating Hours

1.02.2019 17.48

## HIGHLIGHTS

- Easy to manage
- Light equipment does not require a machine battery
- Great for rental fleets
- GPS tracking for location, efficiency and productivity information for a jobsite
- Full machine telematics to assess machine usage, fuel burn and idle time
- Machine documentation to help analyse and improve processes
- Easy management of service intervals and maintenance planning

# TRAINING

ENHANCE YOUR PERFORMANCE

If Ammann machine training was summarised in a single word, it might well be "comprehensive." The training includes multiple expertise levels and modules to benefit all skill levels.

## TRAINING WORLDWIDE


Ammann product and application experts are ready to provide the training you need, no matter where you are. The global nature of Ammann ensures an expert is always near you – ready to offer instruction that ranges from the basics to the specifics relevant to your geographic area. The training can take place at an Ammann facility, your business – or even on a jobsite.

## KEY TEACHING THEMES CONNECT ALL EFFORTS, NO MATTER WHERE THEY OCCUR

**A good balance.** Training often combines a traditional classroom setting with hands-on machine experience. Ammann application experts also can offer instruction on your jobsite.

Training typically includes students from other industry businesses. Participants say conversations with their peers – and learning how they overcome challenges – are other key benefits.

**Learn in your language.** Lessons are taught in many languages, ensuring your team understands key terms and lessons and makes the most of your training investment.

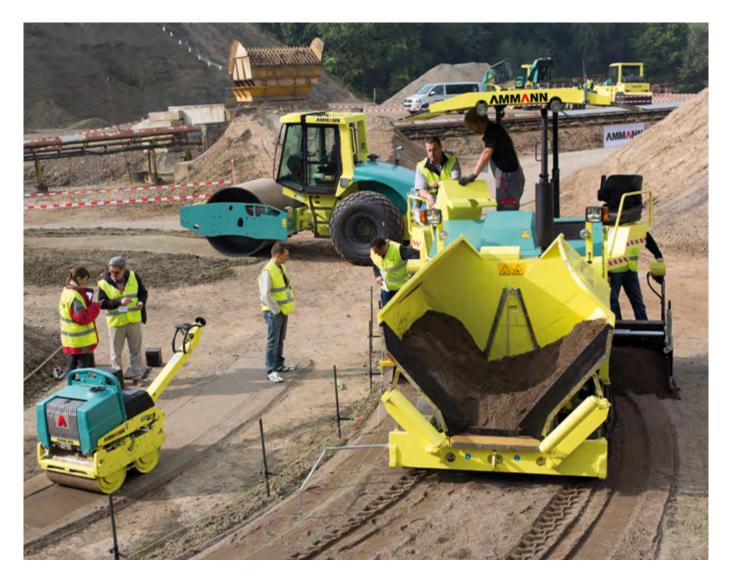

## SPARE PARTS

You can only earn money when your equipment is working. That's why Ammann does everything possible to ensure you have the parts where and when you need them. Those efforts include easy online ordering to avoid confusion and enable tracking, and efficient logistics and availability to help parts reach you quickly.



### WEARING KITS

Some machines handle abrasive materials in demanding applications. While wear is inevitable, downtime can be limited. Wearing kits make replacement of these parts efficient and cost-effective. All the necessary parts – big and small – are in a single box to keep you organised and efficient and to ensure the machines are quickly back up and running.

## **EMERGENCY KITS**

Emergency kits prevent little frustrations from becoming bigger issues that can shut down a machine and even a jobsite. These kits include parts such as switches, fuses and valve coils that are simple and fast to change yet still can cause significant problems if not operating properly. The kits easily fit in the trunk or bed of a vehicle so they're on hand when needed. A crew-member with a bit of technical knowledge can handle this work on the jobsite. These repairs take 2 hours or less.

## MAINTENANCE KITS

Preventive maintenance is crucial to efficient operation and service life of machines. The easier the maintenance, the more likely it is to be completed. Maintenance kits make the upkeep simple. Parts associated with a particular maintenance process are in a single box with a single part number.

## **BROCHURE WITH ALL KITS**

We have a prospect with all kits, and their part numbers are available for you. Just contact your parts consultant and have a digital or hardcopy sent to you.



For additional product information and services please visit: www.ammann.com

